



**GREEN LION**



**Green Lion**

**12V JUMP STARTER IGNITOR  
BLOWER | VACUUM | POWER BANK**

SKU: GNIGNTRJSGY

Model No: GL-JX22

## Table of Contents

Product Overview	2
Specifications	2
Product Sections	3
Packing List	3
Setup Guide	4
Frequently Asked Questions	6
Disposal	7
Warranty	8
Contact Us	8

## Product Overview


The Green Lion Ignitor 12V Jump Starter is a versatile device that combines multiple functions, including a blower, vacuum, and power bank. It features a powerful 70,000 RPM motor, a large 8000mAh battery, and a digital display for easy monitoring. Designed for both gasoline (up to 6.0L) and diesel (up to 4.0L) vehicles, it performs in temperatures as low as -40°C. The device includes smart jumper cables, a variety of accessories, and offers USB-A and Type-C charging options. With a suction power of 9.8 kPa and a current of 1500A, it is a reliable tool for automotive and cleaning needs.

## Specifications

Material	ABS
Battery Capacity	8000mAh 29.6Wh
Power	140W
Voltage	12V
Current	500-1500A
Gasoline Cars	12V/6.0L Engine
Diesel Cars	12V/4.0L Engine
RPM Range	70000 RPM
Noise Level	70 dB
Airflow	40L/min
Suction Power	5.0 kPa-9.8 kPa
Working Temp	-40°C-70°C
Charging Port	Type-C
Charging Time	3 Hrs
Type-C Input	5V/2A, 9V/2A, 12V/1.5A
USB-A Output	5V/2A
Product Weight	541 g
Product Dimensions	52*109*201 mm
Model No	GL-JX22

## Product Sections

1. Vacuum port
2. LED Display
3. Power/start/switch button
4. 12V Start Output
5. USB Output
6. TYPE-C Input
7. Dust blowing/air blowing port

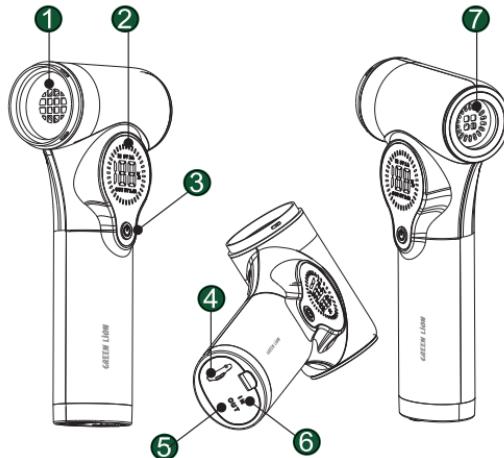

## Packing List

Cleaner X1

1 in 1 mobile cable X1

Juper cable X1

User manual X1

Garbage collection bin X1

Flat long suction nozzle X1

Flat long suction nozzle brush X1

Slender mouthpiece X1

Filter element X1

Short mouthpiece X1


Round nose brush X1

## Setup Guide

### 1. How to Charge This Product

Connect the TYPE-C port of the charging cable to the TYPE-C port at the bottom of the product.


Connect the other end of the charging cable to the power strip to begin charging. The power indicator light on the digital display will flash, indicating that the product is charging.

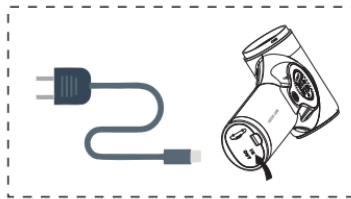

### 2. How to Start the Power Supply

Press and hold the power start button for 2-3 seconds to turn on the device and activate the USB function. The battery percentage will display, along with the charging indicator light.

After charging, press and hold the power start button for 2-3 seconds to turn off the device. It will automatically power off after 240 seconds of inactivity.

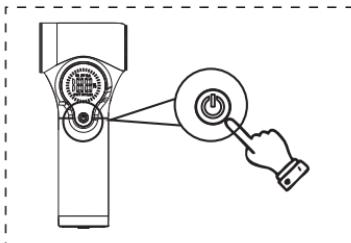

### 3. Starting a Car with the Jump Starter

Connect the jumper cables to the jump starter by plugging the connector into the jump starter socket.


Attach the red clamp to the positive (+) terminal and the black clamp to the negative (-) terminal of the car battery.

Start the vehicle.

Remove the clamps from the battery.


1

1. The plug connects to the jump starter.

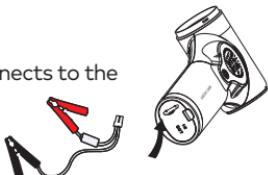

2

2. Red clamp connects to "+" and black clamp connects to "-".




3

3. Start the vehicle.



4


4. Remove the clamps from the battery.



### 4. Vacuum Cleaning/Blowing

Follow the diagram: Screw the garbage collection bin and slender blowing nozzle clockwise. Press the start button to turn the device on. The battery percentage will display.

After turning on the device, click to activate the vacuum cleaner function, then click again to turn it off. The vacuum will start with a suction of 5000 (first gear) and can go up to 9500 (second gear).

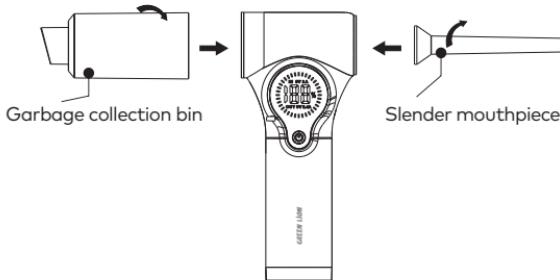

## Vacuum Cleaner Accessories:

Filter Element	
Garbage Collection Bin	
Flat Long Suction Nozzle	
Flat Long Suction Nozzle Brush	
Slender Mouthpiece	
Short Blowing Mouth	
Round-Mouthed Brush	

## Frequently Asked Questions

**Problem 1:** After a few seconds of successful start-up, the device turns off automatically or after removing the clamps.

This issue is typically due to an excessive load on the car battery or aging. If this happens, try restarting the device after running for 3 minutes to recharge the battery. If the problem persists, it indicates that the battery can no longer hold power, and you should replace it.

**Problem 2:** Battery is not charging.

Check if the display shows "IN" or flashes "%". If neither is displayed, verify the connection of the charger.

Ensure that the charging cable is properly connected to both the charger and the power source. You can try using a different charger or cable to resolve the issue. (For power supply, you may use your phone's charger and cable.)

**Problem 3:** Leakage during blowing.

If there is a leakage, check whether the blowing nozzle is properly tightened. Remove the nozzle, blow for 5 seconds, and then reconnect it for further testing.

#### Problem 4: Can't start the car.

If the engine doesn't start at all, first check if the clamps are securely attached. If the battery cable is dirty or rusted, clean it and try again. If the cable is properly connected and the car is still not starting, it could have entered a protected state. In this case, press and hold the start button for 10 seconds until the engine starts. Ensure the clamp is properly connected to the copper terminal of the battery and that the negative electrode is not connected to the car's iron shell, as this could affect the starting performance.

If these solutions do not resolve your issues, please contact customer service for further assistance. Do not disassemble the device.

#### Important Notices:

Keep away from fire.

Do not disassemble, puncture, or expose the device to irregular operations or strong impacts.

Children or individuals with limited intelligence should use the device under adult supervision.

## Disposal

This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.



## **Warranty**

Products that you buy directly from our **Green Lion** website or shop come with a 24-month warranty.

When you buy **Green Lion** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at <https://www.greenlion.net/warranty> and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check:  
<https://www.greenlion.net/warranty>

## **Contact Us**

If you have any questions about this Privacy Policy, please contact us at:

Website: <https://www.greenlion.net/>

Sales: [sales@greenlion.net](mailto:sales@greenlion.net)

Service Support: [Support@greenlion.net](mailto:Support@greenlion.net)

Telegram: [@greenlion\\_global](https://t.me/greenlion_global)

Instagram: [@greenlion\\_global](https://www.instagram.com/greenlion_global)